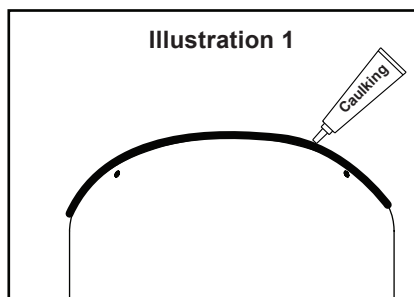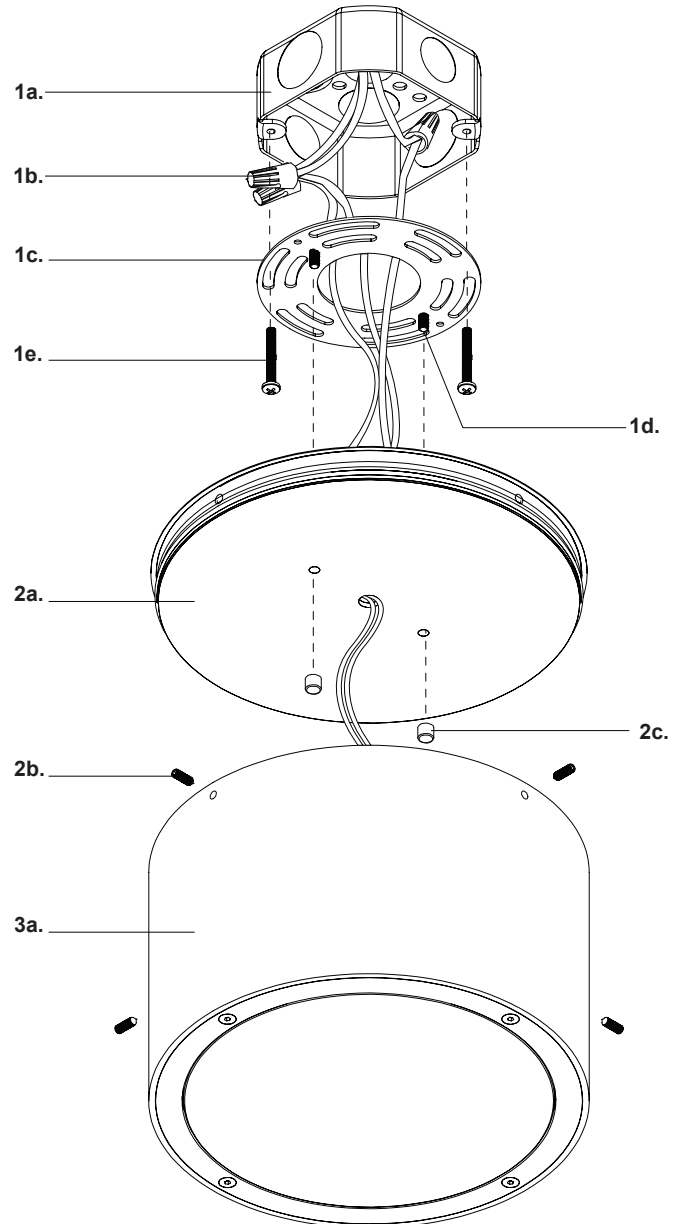# LED Exterior Flush Mount

START FROM HERE

• Make sure **POWER** is **COMPLETELY OFF** at the fuse box
• Have your fixture installed by a qualified licensed electrician
• Prepare everything in a clear area
• Wear gloves at all time during this installation
• Read instructions carefully before you start assembly
• Keep this installation sheet for future reference

Technical Support: 1-855-855-8926

Please Note:

• This Kuzco LED fixtures come with pre-wired LED module(s)
• Unless instructed, Do Not touch any part of the LED module(s) as any unnecessary contact with the module could cause permanent damage
• Use ELV (Electronic Low Voltage) or TRIAC type of dimmer for dimming application
• Must be installed on a covered ceiling
• 120V input

1. Remove fixture from its original package

2. Separate canopy **(2a)** from fixture body **(3a)** by loosening set screws **(2b)**

3. Separate mounting plate **(1c)** from canopy **(2a)** by removing decorative nuts **(2c)**

4. Align mounting plate screws **(1d)** to desired orientation, and then attach mounting plate **(1c)** to electrical junction box **(1a)** using screws provided **(1e)** in hardware package

5. Make proper electrical connections (black to hot "L", white to neutral "N", ground to "GND") with wire nuts **(1b)** provided in hardware package

6. Align and insert mounting plate screws **(1d)** through holes on canopy **(2a)**, secure with decorative nuts **(2c)**

7. To prevent moisture from entering outlet box and causing short, seal around perimeter between fixture and mounting surface with weather resistant caulking **(see illustration 1)**

Illustration 1

Caulking

KUZCO

19054 28th Avenue Surrey, BC Canada V3Z 6M3
T: 604 538 7162 TF: 1-855 85 KUZCO F: 604 538 7196
W: kuzcolighting.com
20190614